

FIRE PROTECTION BUTTERFLY




VALVES



U.S. Hardware Company, Ltd.

YS-2811A FIRE PROTECTION SLOW-CLOSE THREADED BUTTERFLY VALVE

- 1-PC, Full Port
- VITON Seat, Stainless Steel Disc
- Working Pressure : 300 CWP
- Max. Working Temp. : 250 °F

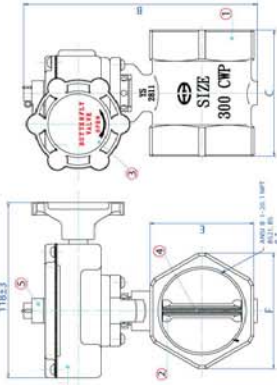

DIMENSIONS (MM)		EN12116 ISO 5211	
SIZE	B±3	C±1	F (REF)
1	129.0	54.0	39.7
1-1/4"	137.9	66.7	44.5
1-1/2"	145.9	73.0	55.0
2"	159.8	82.6	60.3
2-1/2"	175.5	114.0	79.0
			96.0


■ We reserve the right to modify the design / specifications without previous notice for better quality.
 ■ 我方有權隨時更改設計/規格，以便提供品質更佳產品。



MATERIAL LIST		EN12116 ISO 5211	
NO.	PART NAME	MATERIAL	QTY
1	BODY	BRONZE CB3600	1
2	DISC	STAIN. STEEL 304	2
3	HANDWHEEL	WCB	1
4	SEAT	VITON	1
5	INDICATOR	POWDER METAL	1
6	HOUSING	BRASS	1

YS-2811 ISO MOUNTING PAD BRONZE THREADED BUTTERFLY VALVE

- 1-PC, Full Port
- VITON Seat, Stainless Steel Disc
- Working Pressure : 300 CWP
- Max. Working Temp. : 250 °F

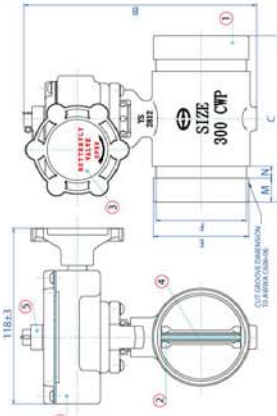

DIMENSIONS (MM)		EN12116 ISO 5211	
SIZE	B±3	C±1	ØE
1-1/4"	138.9	98	42.4±0.41
1-1/2"	145.9	102	48.3±0.48
2"	159.0	104	60.3±0.61
2-1/2"	175.5	114	73.0±0.74


■ We reserve the right to modify the design / specifications without previous notice for better quality.
 ■ 我方有權隨時更改設計/規格，以便提供品質更佳產品。



MATERIAL LIST		EN12116 ISO 5211	
NO.	PART NAME	MATERIAL	QTY
1	BODY	BRONZE CB3600	1
2	DISC	STAIN. STEEL 304	2
3	HANDWHEEL	WCB	1
4	SEAT	VITON	1
5	INDICATOR	POWDER METAL	1
6	HOUSING	BRASS	1

YS-2812 ISO MOUNTING PAD BRONZE THREADED BUTTERFLY VALVE

- 1-PC, Full Port
- VITON Seat, Stainless Steel Disc
- Working Pressure : 300 CWP
- Max. Working Temp. : 250 °F

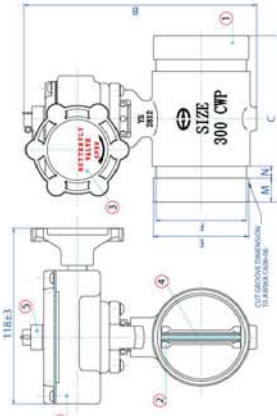

DIMENSIONS (MM)		EN12116 ISO 5211	
SIZE	B±3	C±1	ØE
1-1/4"	138.9	98	42.4±0.41
1-1/2"	145.9	102	48.3±0.48
2"	159.0	104	60.3±0.61
2-1/2"	175.5	114	73.0±0.74


■ We reserve the right to modify the design / specifications without previous notice for better quality.
 ■ 我方有權隨時更改設計/規格，以便提供品質更佳產品。



MATERIAL LIST		EN12116 ISO 5211	
NO.	PART NAME	MATERIAL	QTY
1	BODY	BRONZE CB3600	1
2	DISC	STAIN. STEEL 304	2
3	STEM	STAIN. STEEL 630 (17-4)	1
4	DISC SEAT	VITON	1
5	GASKET	PTFE	1
6	GLAND PACKING	PTFE	1
7	O-RING	NBR	1
8	GLAND	BRASS	1
9	NUT	STEEL	1
10	WASHER	STAIN. STEEL 304	1
11	HANDLE NUT	STEEL	1
12	LOCK PIN	BRASS	1
13	HANDLE	STAIN. STEEL 304	1
14	HANDLE COVER	PVC	1

YS-2812 ISO MOUNTING PAD BRONZE THREADED BUTTERFLY VALVE

- 1-PC, Full Port
- VITON Seat, Stainless Steel Disc
- Working Pressure : 300 CWP
- Max. Working Temp. : 250 °F

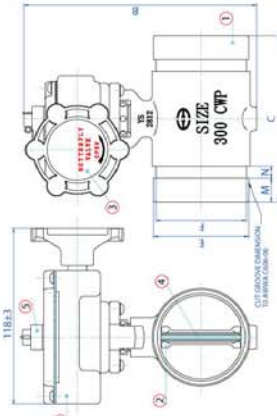

DIMENSIONS (MM)		EN12116 ISO 5211	
SIZE	B±3	C±1	ØE
1-1/4"	138.9	98	42.4±0.41
1-1/2"	145.9	102	48.3±0.48
2"	159.0	104	60.3±0.61
2-1/2"	175.5	114	73.0±0.74


■ We reserve the right to modify the design / specifications without previous notice for better quality.
 ■ 我方有權隨時更改設計/規格，以便提供品質更佳產品。



MATERIAL LIST		EN12116 ISO 5211	
NO.	PART NAME	MATERIAL	QTY
1	BODY	BRONZE CB3600	1
2	DISC	STAIN. STEEL 304	2
3	STEM	STAIN. STEEL 630 (17-4)	1
4	DISC SEAT	VITON	1
5	GASKET	PTFE	1
6	GLAND PACKING	PTFE	1
7	O-RING	NBR	1
8	GLAND	BRASS	1
9	NUT	STEEL	1
10	WASHER	STAIN. STEEL 304	1
11	HANDLE NUT	STEEL	1
12	LOCK PIN	BRASS	1
13	HANDLE	STAIN. STEEL 304	1
14	HANDLE COVER	PVC	1

YS-2811 ISO MOUNTING PAD BRONZE THREADED BUTTERFLY VALVE

- 1-PC, Full Port
- VITON Seat, Stainless Steel Disc
- Working Pressure : 300 CWP
- Max. Working Temp. : 250 °F

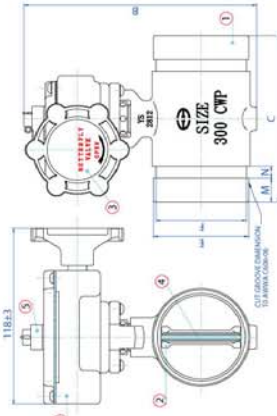

DIMENSIONS (MM)		EN12116 ISO 5211	
SIZE	B±3	C±1	ØE
1-1/4"	138.9	98	42.4±0.41
1-1/2"	145.9	102	48.3±0.48
2"	159.0	104	60.3±0.61
2-1/2"	175.5	114	73.0±0.74


■ We reserve the right to modify the design / specifications without previous notice for better quality.
 ■ 我方有權隨時更改設計/規格，以便提供品質更佳產品。



MATERIAL LIST		EN12116 ISO 5211	
NO.	PART NAME	MATERIAL	QTY
1	BODY	BRONZE CB3600	1
2	DISC	STAIN. STEEL 304	2
3	STEM	STAIN. STEEL 630 (17-4)	1
4	DISC SEAT	VITON	1
5	GASKET	PTFE	1
6	GLAND PACKING	PTFE	1
7	O-RING	NBR	1
8	GLAND	BRASS	1
9	NUT	STEEL	1
10	WASHER	STAIN. STEEL 304	1
11	HANDLE NUT	STEEL	1
12	LOCK PIN	BRASS	1
13	HANDLE	STAIN. STEEL 304	1
14	HANDLE COVER	PVC	1

YS-2811 ISO MOUNTING PAD BRONZE THREADED BUTTERFLY VALVE

- 1-PC, Full Port
- VITON Seat, Stainless Steel Disc
- Working Pressure : 300 CWP
- Max. Working Temp. : 250 °F

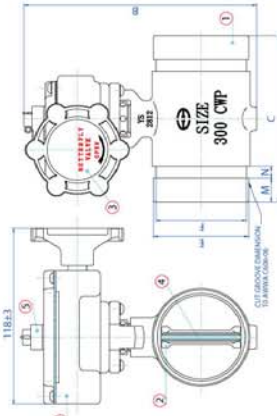

DIMENSIONS (MM)		EN12116 ISO 5211	
SIZE	B±3	C±1	ØE
1-1/4"	138.9	98	42.4±0.41
1-1/2"	145.9	102	48.3±0.48
2"	159.0	104	60.3±0.61
2-1/2"	175.5	114	73.0±0.74

■ We reserve the right to modify the design / specifications without previous notice for better quality.
 ■ 我方有權隨時更改設計/規格，以便提供品質更佳產品。



MATERIAL LIST		EN12116 ISO 5211	
NO.	PART NAME	MATERIAL	QTY
1	BODY	BRONZE CB3600	1
2	DISC	STAIN. STEEL 304	2
3	STEM	STAIN. STEEL 630 (17-4)	1
4	DISC SEAT	VITON	1
5	GASKET	PTFE	1
6	GLAND PACKING	PTFE	1
7	O-RING	NBR	1
8	GLAND	BRASS	1
9	NUT	STEEL	1
10	WASHER	STAIN. STEEL 304	1
11	HANDLE NUT	STEEL	1
12	LOCK PIN	BRASS	1
13	HANDLE	STAIN. STEEL 304	1
14	HANDLE COVER	PVC	1

YS-2101A

FIRE PROTECTION SERVICE
175 CWP BRONZE
GATE VALVE, OS&Y, RS



YS-2106A

FIRE PROTECTION SERVICE
BRONZE ANGLE VALVE



YS-2104A

FIRE PROTECTION SERVICE
BRONZE GLOBE VALVE



YS-2050A

3 Way GLOBE VALVE



Y.S. Hardware Company, Ltd.
昇歷金屬股份有限公司

No. 30, Tou-Lung Lanne, Tou-Lung Li, Lukang,
Changhua 505, Taiwan (R.O.C)
Tel. 886-4-7712691~2 Fax. 886-4-7712693
E-mail. yshh@ms66.hinet.net
<http://www.yvalve.com.tw>

